



## *NovaJack Skidding Cone Operation Manual*



SKIDDING CONE  
NS-702302

Skid logs safely with your ATV !

The NovaJack skidding cone will prevent logs from being stopped by roots, stumps or residual trees. It also protects your valuable trees along the path from being damaged.

Operator safety is enhanced, as the cone prevents sudden stops caused by logs getting caught in an obstacle.

Made of high-performance polymer plastic, the skidding cone is strong, yet flexible. It's 20" opening lets you haul large logs or bunches of smaller logs.

Use the skidding cone to skid logs directly behind your ATV with the pulling plate, or bring logs to the trail using a corner block and Kevlar™ rope (see Skidding cone kit). It also works very well with the Capstan Winch. Use it year round, down to temperatures of -30°C (-22°F).

Material : Polymer  
Weight : 11 lb (5 kg)  
Opening size : 20" (51 cm)  
Height : 26.5" (67 cm)

**NovaJack**  
375, Courcelette  
Sherbrooke, QC, Canada, J1H 3X4  
Phone: (819) 562-4189  
Toll Free: (800) 567-7318  
Fax: (819) 562-4256  
Email: [info@novajack.com](mailto:info@novajack.com)  
Web: [www.novajack.com](http://www.novajack.com)

1. Install the corner block on a solid tree using the polyester sling. The pulley of the corner block must face the tree.



2. Install the chain-choker around the log.



3. Thread the chain-choker through the opening of the skidding cone and position the cone on the top of the log to be skidded.



4. Set the automatic tripper on the towing rope.

Depending on the distance your corner block anchor tree is from the trail, set the automatic tripper at the appropriate distance from the end of the rope by turning the chain link 1/2 turn on the rope and then insert it into the metal cartridge. You will need to experiment to assess the right distance.

When the automatic tripper reaches the corner block, the tow rope is automatically released from the block permitting non-stop skidding from the forest to the roadside.




5. Hook the tow rope on the corner block. Attach the pulling plate on the ATV hitch and attach the cable to the plate with the clove hitch.



6. Start driving along the trail and watch the log come out of the woods.

When the automatic tripper hits the corner block, the tow rope is released from the block. No need to stop and manually remove it !

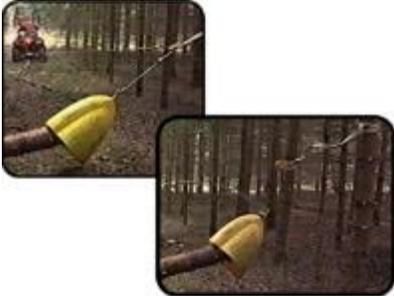

7. From start to finish without getting off your ATV... the way skidding was meant to be !

